

清晰号角式扬声器

WT-7006N

6w
MAX



清晰号角式扬声器

WT-7015N

15w
MAX



清晰号角式扬声器


WT-7030N

30w
MAX




安装

调整扬声器的方向使，松开扬声器两侧的两只螺栓然后将扬声器指向适当的角度。然后将螺栓上紧。

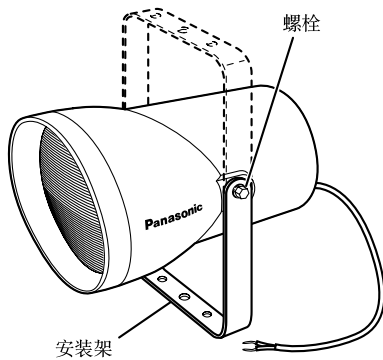


连接

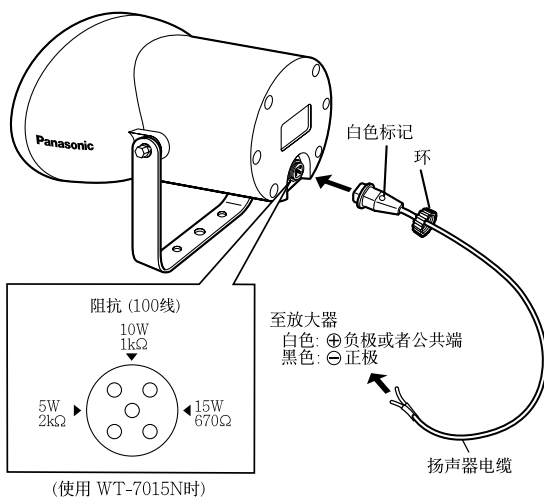


尺寸

WT-7006N

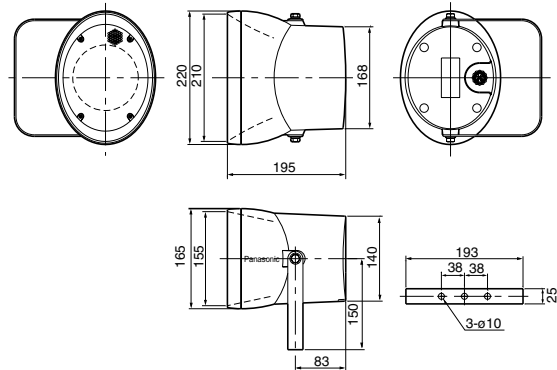

WT-7015N, WT-7030N

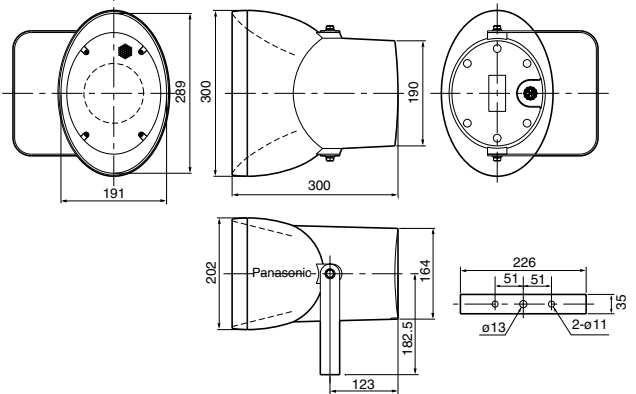

单位: mm

规格

型号	WT-7006N	WT-7015N	WT-7030N
额定输入	6W	15W	30W
输入阻抗	1.7kΩ (6W), 3.3kΩ (3W), 10kΩ (1W)	670Ω (15W), 1kΩ (10W), 2kΩ (5W)	330Ω (30W), 500Ω (20W), 1kΩ (10W)
声压电平	96dB (1m/1W)	99dB (1m/1W)	101dB (1m/1W)
频率响应	200至12,000Hz	180至15,000Hz	180至15,000Hz
尺寸(W)×(H)×(D)	220×233×195mm (包括安装架)	300×284×300mm (包括安装架)	300×284×300mm (包括安装架)
重量(大约)	1.5kg	2.7kg	3.3 kg
表面	ABS树脂, 芒塞尔2.1Y 7.7/1.1)		

• 参见第40页扬声器颜色的例子。